

TWISTER™ XL3

Motorized Backpack ULV Sprayer

CURTIS DYNA-FOG® Ltd.


from **B&G**



HIGH-SPEED ROTARY TYPE,
3-STAGE STEEL SHAFT BLOWER

0.13 GALLON (500 ML) FUEL TANK
PROVIDES 50 MINUTES OF RUN TIME

26 LBS (11.8 KG) DRY WEIGHT

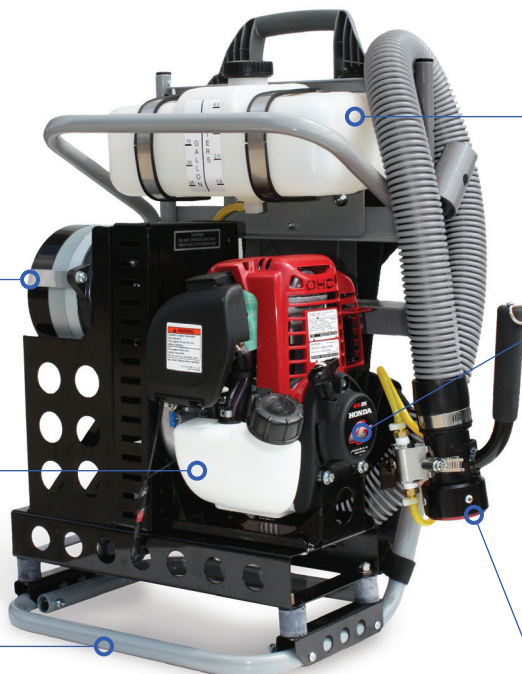

1-GAL FORMULATION TANK

LOW EMISSION, HIGH-PERFORMANCE
HONDA 4-STROKE MOTOR ENGINE



SINGLE HIGH-OUTPUT NOZZLE WITH
INTERCHANGEABLE ORIFICES AND
UNIFORM, TRUE ULV DROPLET SIZE

FEATURES & BENEFITS

The lightweight Twister XL3 boasts high-output coverage through 3 flow rate options, making it an excellent choice for a variety of backpack applications.

UNMATCHED MOSQUITO CONTROL

This unit excels in controlling mosquitoes and other flying insects with its patented nozzle that produces 90% of the droplets under 20 microns at flow rates under 6.0 oz/min (178 ml/min). Higher flow rates produce larger droplets.

LIGHTWEIGHT & COMPACT

The Twister XL3 is designed as a lightweight compact aerosol generator that is ergonomically suited for long periods of use by the operator. The Twister XL3 is lightweight enough for most ATV racks, golf carts and small carts.

VORTICAL ULV NOZZLE

Single high-output nozzle with interchangeable restricting orifice to produce flow rate of 1.5 oz/min; 45 ml/min; or 17 oz/min. The quick-change orifice system allows the operator to increase flow rates resulting in larger droplets produced, which are ideal for leaving a residual deposit on surfaces such as vegetation and walls.

HIGH-PERFORMANCE ENGINE

The Twister XL3 is powered by a high-performance, emissions-compliant Honda 4-stroke engine. It offers low fuel consumption and operates quietly, with heavy-duty isolators that reduce engine vibration for smoother performance. Running at 7500 rpm, this compact and powerful machine is ideal for adulticide, barrier spraying, and spot treatments, making it the ultimate solution for pest control applications.

DURABLE BLOWER TECHNOLOGY

The high-speed, belt-driven 3-stage rotary blower delivers an impressive 95 cfm (2.68 cubic meters/min) of airflow, ensuring maximum coverage and effectiveness. Up to 3 psi (0.2 bar) pressure for consistent performance. Built with a ground steel shaft and supported by two high-quality ball bearings for durability.

INCLUDED ACCESSORIES

Viscometer and funnel are included.

INDUSTRIES

Agriculture
Disinfection
Pest Control
Vector Control
Odor Control

COMPATIBILITY

Water or Oil-Based Insecticides
& Disinfectants

DESCRIPTION	LEGACY PART #	ORDER #
Twister XL3	39750	1108004043



SCAN
FOR MORE
PRODUCT
INFORMATION

Contact us: 800-544-8811 | bgequip.com | 135 Region South Drive, Jackson, GA 30233